


RoughDeck™ Rough-n-Ready System Floor Scale / Indicator Package

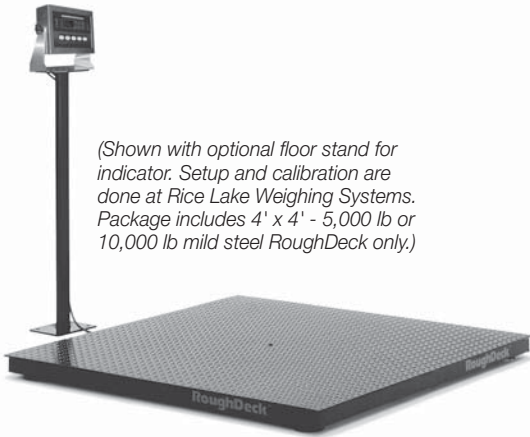

(Shown with optional floor stand for indicator. Setup and calibration are done at Rice Lake Weighing Systems. Package includes 4' x 4' - 5,000 lb or 10,000 lb mild steel RoughDeck only.)

Standard Features

- Heavy-duty industrial design
- Structural steel channel frame
- Four NTEP-certified alloy steel, shear beam load cells
- 20 ft SURVIVOR® EL147HE hostile environment load cell cable with quick disconnect
- TuffSeal™ JB4SS Stainless Steel, NEMA 4X j-box with signal trim card
- Rugged diamond deck safety treadplate
- Four adjustable stainless steel SUREFOOT support feet
- Threaded eyebolt hole for easy lifting
- Package configured and calibrated for 5,000 divisions
- Five-year warranty on RoughDeck only with quick disconnect



Choice of 4 Quality Indicators



Refer to indicator section of catalog for complete specifications

Specifications

ROUGHDECK HP FLOOR SCALE

LOAD CELL CAPACITY:

2,500 lb on 5,000 lb bases
4,000 lb on 10,000 lb bases

END LOAD CAPACITY:

100% full scale at 5000 lbs
80% of full scale at 10,000 lbs

APPROVALS:

NTEP-certified per H-44 at 5,000 Divisions, Class III,
CC #92-001A9, Measurement Canada Approved, AM-4827,
HC Series

CABLE LENGTH:

20 ft (6.1 m)

HEIGHT:

3.25 ft (82.6mm) min

WARRANTY:

Five-year limited warranty

ROUGHDECK ROUGH-N-READY SYSTEM

PACKAGE INCLUDES: IQ plus® 355, 420 Plus, IQ plus® 390-DC,
or IQ plus® 590-DC indicator, RoughDeck 4' x 4' floor scale,
20 ft of hostile environment load cell cable and quick disconnect.

Capacity

PART#	INDICATOR	LB (KG)	EST. SHIP WEIGHT
53423 IQ plus 590, 115 VAC	5,000 lb (2500 kg)	405 lb
53424 IQ plus 390, 115 VAC	5,000 lb (2500 kg)	405 lb
87153 420 Plus, 115 VAC	5,000 lb (2500 kg)	405 lb
53431 IQ plus 355, 230 VAC	5,000 lb (2500 kg)	405 lb
53420 IQ plus 590, 115 VAC	10,000 lb (5000 kg)	405 lb
53421 IQ plus 390, 115 VAC	10,000 lb (5000 kg)	405 lb
87154 420 Plus, 230 VAC	5,000 lb (2500 kg)	405 lb
53425 IQ plus 355, 115 VAC	5,000 lb (2500 kg)	405 lb
53429 IQ plus 590, 230 VAC	5,000 lb (2500 kg)	405 lb
53430 IQ plus 390, 230 VAC	5,000 lb (2500 kg)	405 lb
87155 420 Plus, 115 VAC	10,000 lb (5000 kg)	405 lb
53422 IQ plus 355, 115 VAC	10,000 lb (5000 kg)	405 lb
53426 IQ plus 590, 230 VAC	10,000 lb (5000 kg)	405 lb
53427 IQ plus 390, 230 VAC	10,000 lb (5000 kg)	405 lb
87156 420 Plus, 230 VAC	10,000 lb (5000 kg)	405 lb
53428 IQ plus 355, 230 VAC	10,000 lb (5000 kg)	405 lb

Consult factory for Canadian Legal-for-Trade versions

RoughDeck™ Rough-n-Ready System

PART#	FLOOR SCALE CAPACITY	INDICATOR	EST. SHIP WEIGHT	PRICE
4' x 4' Roughdeck™ Indicator Package with tilt stand				
53423	5,000 lb	IQ plus 590, 115 VAC	405 lb	\$2,100.00
53424	5,000 lb	IQ plus 390, 115 VAC	405 lb	2,100.00
87153	5,000 lb	420 Plus, 115 VAC	405 lb	2,100.00
53425	5,000 lb	IQ plus 355, 115 VAC	405 lb	1,960.00
53429	5,000 lb	IQ plus 590, 230 VAC	405 lb	2,100.00
87154	5,000 lb	420 Plus, 230 VAC	405 lb	2,100.00
53430	5,000 lb	IQ plus 390, 230 VAC	405 lb	2,100.00
53431	5,000 lb	IQ plus 355, 230 VAC	405 lb	1,960.00
53420	10,000 lb	IQ plus 590, 115 VAC	405 lb	2,100.00
53421	10,000 lb	IQ plus 390, 115 VAC	405 lb	2,100.00
87155	10,000 lb	420 Plus, 115 VAC	405 lb	2,100.00
53422	10,000 lb	IQ plus 355, 115 VAC	405 lb	1,960.00
53426	10,000 lb	IQ plus 590, 230 VAC	405 lb	2,100.00
53427	10,000 lb	IQ plus 390, 230 VAC	405 lb	2,100.00
87156	10,000 lb	420 Plus, 230 VAC	405 lb	2,100.00
53428	10,000 lb	IQ plus 355, 230 VAC	405 lb	1,960.00
Canadian Weights & Measures Approved				
94693	2,500 kg	IQ 590, 115 VAC		2,100.00
94694	2,500 kg	IQ 390, 115 VAC		2,100.00
94695	2,500 kg	420 plus, 115 VAC		2,100.00
94696	2,500 kg	IQ 355, 115 VAC		1,960.00
94697	5,000 kg	IQ 590, 115 VAC		2,100.00
94698	5,000 kg	IQ 390, 115 VAC		2,100.00
94699	5,000 kg	420 plus, 115 VAC		2,100.00
94700	5,000 kg	IQ 355, 115 VAC		1,960.00
Options/Accessories				
18777	Floor anchor plates, mild steel (set of two)			30.00
19352	RoughDeck floor stand for indicator, 36.3" high, mild steel			205.00
66662	Additional operating manual			10.00
IQ plus 355, 420 Plus, 390-DC or 590-DC indicator:				
77925	Revolution Scaleware™ software			35.00
66503	Additional operating manual, IQ plus 355			21.00
85127	Additional operating manual, 420 Plus			21.00
48820	Additional operating manual, IQ plus 390-DC			21.00
51778	Additional operating manual, IQ plus 590-DC			21.00

*Access ramps, pit frames and portability frames available.
See pages FS-35, FS-36, FS-37, FS-38*